Circuit Debugging Assistant
Circuit Diagnostic Report

Report ID: TEST-2PAGE-001
Date: 2023-11-15 03:43
Circuit: Rc Low Pass

STATUS:
NO ISSUES DETECTED IN CHECKS

1. Uploaded versus Expected Circuit

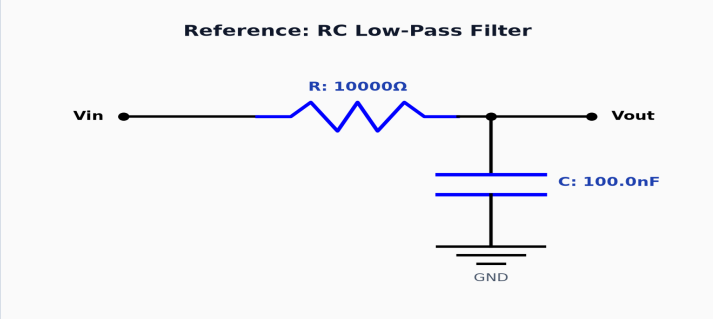


Figure 1A: Uploaded Circuit Schematic

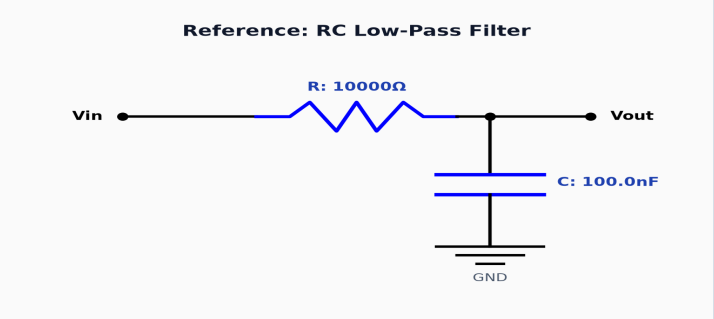


Figure 1B: Expected / Reference Circuit Model

2. Diagnosis Summary

The device under test was analyzed as a **Rc Low Pass**. Electrical network analysis identified 1 potential topology or connectivity issue(s) requiring engineer verification.

3. Detected Flaws & Consistency Register

Severity	Component / Net	Finding & Evidence	Recommended Action
Passed	**R1**	Nominal value verified	None


4. Confirmed Component Values

Reference	Component Type	Extracted / Nominal Value	Tolerance	Verification Status
R	Film Resistor	10000 Ω	±5.0%	Confirmed
C	Ceramic / Electrolytic Capacitor	100.00 nF	±10.0%	Confirmed
VIN	Input Voltage Source	1 V	±1.0%	Confirmed

5. Expected Behaviour & Governing Calculations

- **Transfer Function:** $H(f) = 1 / (1 + j\,2\pi\,f\,R\,C)$
- **Theoretical Cutoff Frequency:** $f_c = 1 / (2\pi \cdot R \cdot C)$ = **159.15 Hz**
- **Initial Step Current (Independent Observable):** $I_{step}(0+) = V_{in} / R$ = **0.10 mA**

6. Numerical Simulation Curves

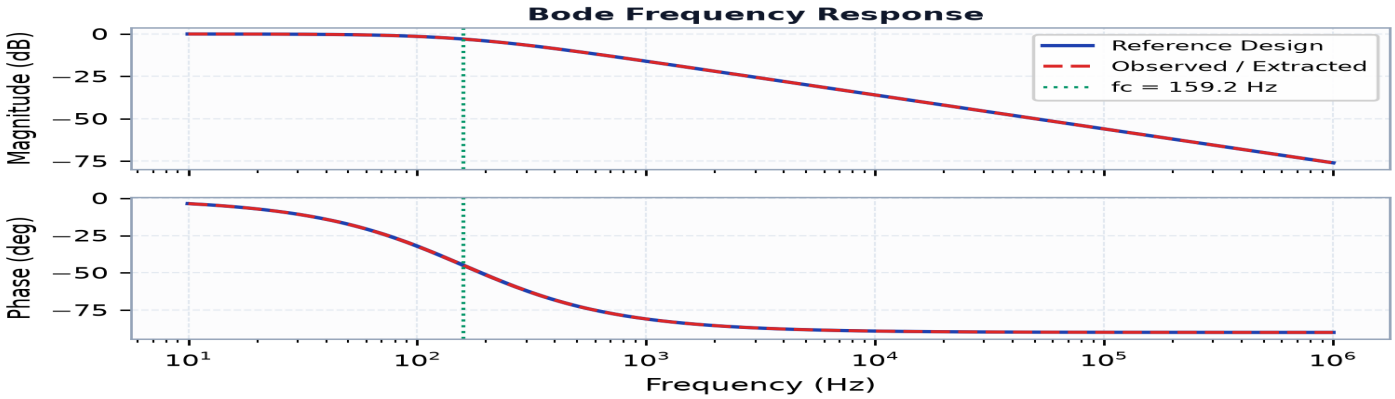

7. Recommended Engineering Actions

1. **Physical Verification:** Perform **In-circuit DMM measurement** to independently separate ambiguous parameter hypotheses.
2. **Signal Integrity:** Measure test points with a 10:1 passive probe to avoid probe capacitance loading.
3. **Post-Repair Gate:** Confirm that measured response stays within ±5% of reference cutoff before releasing design.